

SMALL-SCALE C&I ESS SOLUTION

DEYE SUMMER BOS SERIES



Convenient

- Quick installation standard of 19-inch embedded designed module is comfortable for installation and maintenance.



Intelligent BMS

- It has protection functions including over-discharge, over-charge, over-current and over-high or low temperature. The system can automatically manage charge and discharge state and balance current and voltage of each cell.



Eco-friendly

- The whole module is non-toxic, non-polluting and environmentally friendly.



Safe and reliable

- Cathode material is made from LiFePO4 with safety performance and long cycle life. The module has less self-discharge, up to 6 months without charging it on shelf, no memory effect, excellent performance of shallow charge and discharge.



Flexible configuration

- Multiple battery modules can be in parallel for expanding capacity and power. Support USB upgrade, remote up grade(Compatible with Deye inverter).



Wide temperature

- Working temperature range is from -20°C to 55°C, with excellent discharge performance and cycle life.

≥6000

Cycles

Flexible
Expansion

35kWh ~ 87kWh

70%

EOL

10 years

Warranty for long-term
peace of mind




Rack-Mounted Battery (HV)

Model		BOS-G Pro				
Main Parameter						
Cell Chemistry		LiFePO ₄				
Module Energy (kWh)		5.12				
Module Nominal Voltage (V)		51.2				
Module Capacity (Ah)		100				
Battery Module Number		BOS-G25 Pro	BOS-G40 Pro	BOS-G60 Pro	BOS-G85 Pro	
Battery Module Qty In Series (Optional)		5 (Min)	8	12	17 (Max)	
System Nominal Voltage (V)		256	409.6	614.4	870.4	
System Operating Voltage (V)		220~292	352~467.2	528~700.8	748~992.8	
System Energy (kWh)		25.6	40.96	61.44	87.04	
System Usable Energy (kWh)		23.04	36.86	55.3	78.33	
		25.6	40.96	55.3	87.04	
Charge / Discharge ²		50				
Current (A)		100				
Peak Discharge (2 mins, 25°C)		125				
Working Temperature (°C)		Charge : 0 ~ 55 / Discharge : -20 ~ 55				
Status Indicator		Yellow : Battery High Voltage Power On Red : Battery System Alarm				
Communication Port		CAN2.0 / RS485				
Humidity		5% ~ 85%RH				
Altitude		≤3000m				
IP Rating of Enclosure		IP20				
Dimension (W×D×H,mm)		530 × 602 × 1629		530 × 602 × 2219		1060 × 602 × 1629
Weight Approximate (kg)		290	428	622	883	
Installation Location		Rack Mounting				
Storage Temperature (°C)		0 ~ 35				
Recommend Depth of Discharge		90%				
Cycle Life		25 ± 2°C, 0.5C / 0.5C, EOL70% ≥ 6000				
Warranty ^c		10 years				
Certification		UN38.3 / CE / CE-EMC / IEC62040 / CEC / VDE				

1. DC Usable Energy, test conditions : 90% DOD, 0.3C charge & discharge at 25°C. System usable energy may vary due to system configuration parameters.
2. The current is affected by temperature and SOC.
3. The warranty is due whichever reached first of warranty period or life cycle power.
4. Made in China.


Model	Description
-------	-------------

BOS-G-PDU-2	High Voltage Battery cluster control box conforming to European or British Standards
Operating Voltage	200 ~ 1000Vdc
Nominal Charge/Discharge Current	100A
Max.Charge/Discharge Current	120A
DC Input Rating	12±2%V / 4.15A
Operating Temperature Range	-20 ~ 65°C
Ingress Protection	IP20
Dimension (W×D×H)	440×570×150mm
Weight Approximate	19kg

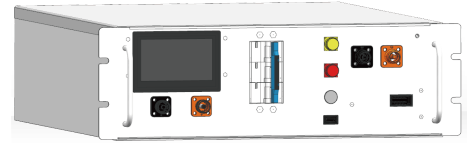

High voltage box Standard configuration:

- ① 120 ohm terminal resistance
- ② 250mm communication cable
- ③ 140mm power cable
- ④ 2.1m power cable
- ⑤ EPCable2.0
(Standard 2-meter power cable connected to the positive pole of the external PCS)
- ⑥ ENCable2.0
(Standard 2-meter power cable connected to the negative pole of the external PCS)
- ⑦ 1000mm communication cable between two battery racks
- ⑧ 1000mm power cable between the two battery racks
- ⑨ 140 mm ground wire

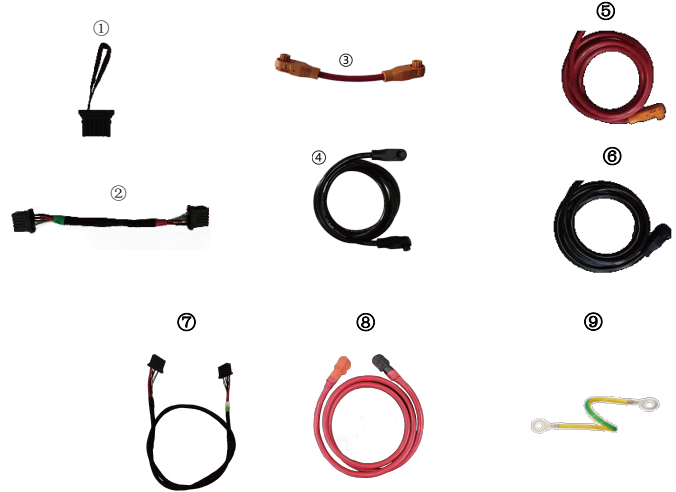

BOS-G-Pack5.1	5.12 kwh battery module
----------------------	-------------------------

Battery Type	LiFePO ₄ (LFP)
Nominal Voltage	51.2Vdc
Rated Capacity	100Ah
Rated Energy	5.12kWh
Nominal Charge/Discharge Current	100A
Peak.Discharge Current	120A
Charge Temperature	0 ~ 55°C
Discharge Temperature	-20°C ~ 55°C
Storage Temperature	0°C ~ 35°C
Ingress Protection	IP20
Dimension (W×D×H)	440×585×133mm
Weight Approximate	46kg




Battery module Standard configuration:

- ① 160mm communication cable
- ② 200mm power cable

Model	Description
-------	-------------


3U-HRACK(Optional)	Standard 19inch rack, caninstall 12 pcs batteries and 1 pcs High Voltage Battery cluster control box
---------------------------	--

Dimension (W×D×H) Weight Approximate	530×602×2219mm 51kg
---	------------------------

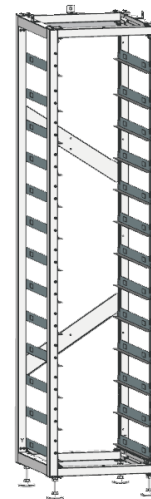

3U-LRACK(Optional)	Standard 19inch rack, caninstall 8 pcs batteries and 1 pcs High Voltage Battery cluster control box
---------------------------	---

Dimension (W×D×H) Weight Approximate	530×602×1629mm 41kg
---	------------------------

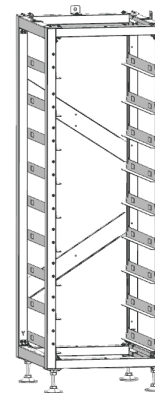

Typical Application Scenarios

BOS-W60 Pro

Inverter 50kW

BOS-W60 Pro

Inverter 50kW




Maximum support for 16 racks of batteries in parallel

Maximum support for 10 inverters in AC parallel operation

BOS-W85 Pro


Inverter 80kW

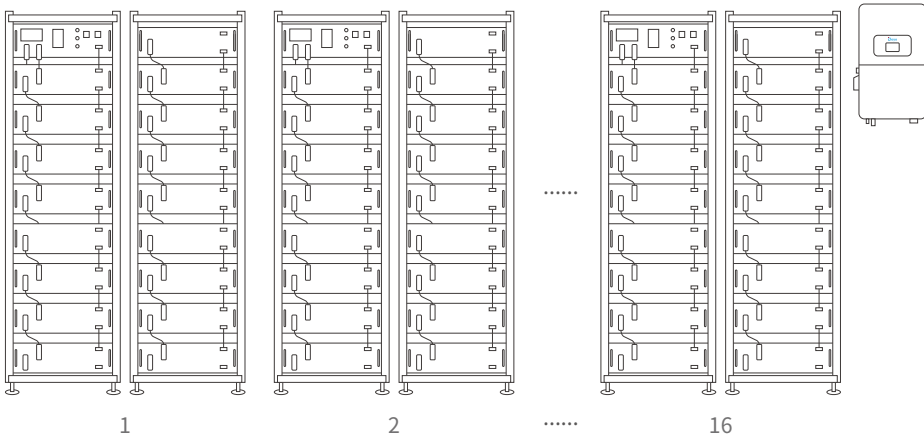

Maximum support for 16 clusters of batteries in parallel

BOS-W85 Pro

Inverter 80kW

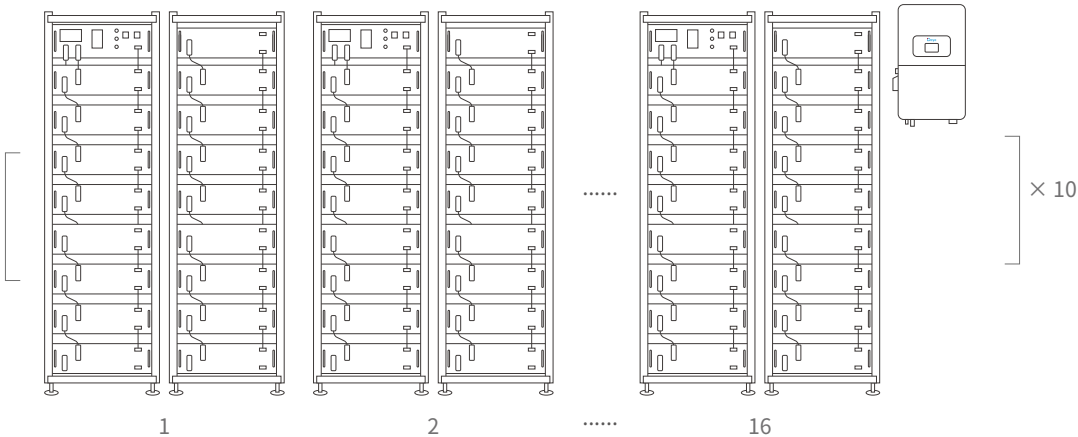

Maximum support for 10 inverters in AC parallel operation



To Make ESS Better



Deye ESS Facebook



Deye ESS



www.deyeess.com